

Technical Specifications

Power supply	10 ... 30VDC
Power consumption	typ. 0.3W, max. 0.6W
Loxone Air interface	868MHz (SRD Band Europe), 4 channels, max. 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 channels, max. 13.2mW internal antenna
Modbus RTU interface	1 Modbus device, 253 sensors and actuators adjustable baud rate & parity data types: 16 & 32 bit
Ambient Temperature	-20 ... 65°C / -4 ... 149°F
Humidity	max. 95% r.H. (non condensing)
Degree of protection	IP20

Connecting cable

Wire cross-section	0.14mm ² / AWG26
Temperature resistance	80°C / 176°F
Length	250mm / 9.84"
Part. No.	000589



For more information
about this product, visit
loxone.com/help/Modbus-Air

**Loxone
Electronics GmbH**
Smart Home 1
4154 Kollerschlag
Austria

Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom



For additional information,
declaration of conformity, visit
www.loxone.com/datasheets

V290623

Need Help?
loxone.com/support




Modbus Air

Part No.: 100565

About the Product

The Loxone Modbus Air is designed for wireless integration of devices with Modbus RTU interface.

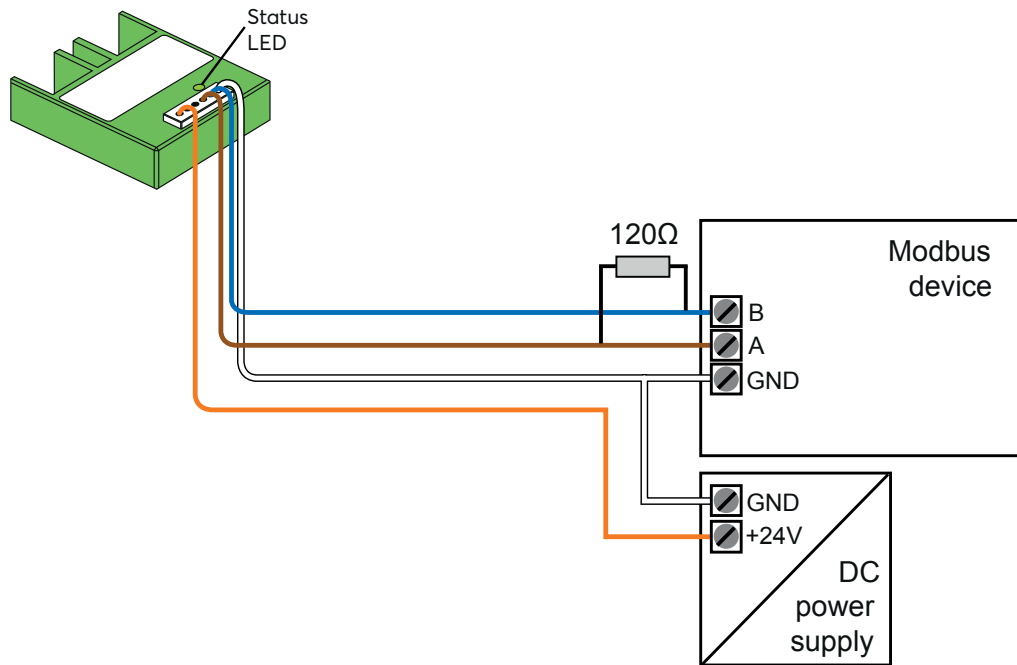

Installation may only be carried out with the power supply switched off!